

Specification of Thermoelectric Module

TEC1-12730

Description

The 127 couples, 55 mm × 55 mm size module which is made of selected high performance ingot to achieve superior cooling performance and greater delta T up to 70, designed for superior cooling and heating up to 100 °C applications. If higher operation or processing temperature is required, please specify, we can design and manufacture the custom made module according to your special requirements.

Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance


Application

- Food and beverage service refrigerator
- Portable cooler box for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

Performance Specification Sheet

Th (°C)	27	50	Hot side temperature at environment: dry air, N ₂
DT _{max} (°C)	70	79	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U _{max} (Voltage)	16.0	17.2	Voltage applied to the module at DT _{max}
I _{max} (amps)	26	26	DC current through the modules at DT _{max}
Q _{Cmax} (Watts)	260.4	284.6	Cooling capacity at cold side of the module under DT = 0 °C
AC resistance (ohms)	0.47	0.51	The module resistance is tested under AC
Tolerance (%)	± 10		For thermal and electricity parameters

Geometric Characteristics Dimensions in millimeters

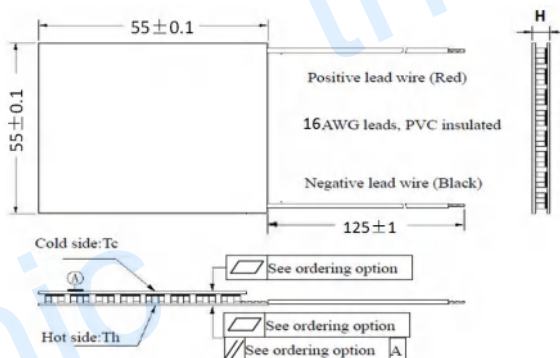

Ordering Option

Suffix	Thickness (mm)	Flatness/ Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	0:3.4±0.1	0:0.1/0.1	125±1/Specify
TF	1:3.4±0.05	1:0.05/0.05	125±1/Specify

Eg. TF01: Thickness 3.4 ± 0.1(mm) and Flatness 0.05 / 0.05 (mm)

Manufacturing Options

A. Solder:

1. T100: BiSn (Tmelt=138°C)
2. T200: CuAgSn (Tmelt = 217°C)
3. T240: SbSn (Tmelt = 240°C)

B. Sealant:

1. NS: No sealing (Standard)
2. SS: Silicone sealant
3. EPS: Epoxy sealant

C. Ceramics:


1. Alumina (Al₂O₃, white 96%)

D. Ceramics Surface Options:

1. Blank ceramics (not metalized)

Naming for the Module

TEC1-12730-X-X-X-X



TEC1-12730-T100-NS-TF01-AIO

T100: BiSn (Tmelt=138°C)

NS: No sealing

AIO: Alumina white 96%

TF01: Thickness ± 0.1(mm) and Flatness/Parallelism 0.025/0.025(mm)


Creative technology with fine manufacturing processes provides you the reliable and quality products

Tel: +86-791-88198288 Fax: +86-791-88198308 Email: sales@thermonamic.com.cn Web Site: www.thermonamic.com.cn


Specification of Thermoelectric Module

TEC1-12730



Performance Curves at $T_h=27^\circ\text{C}$

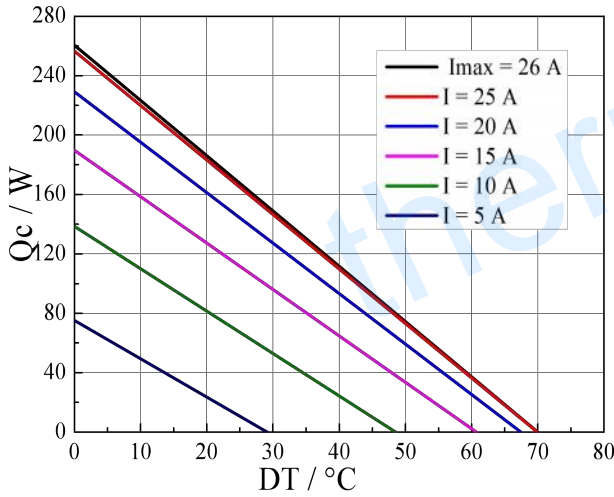



Performance Curves at $T_h=50^\circ\text{C}$

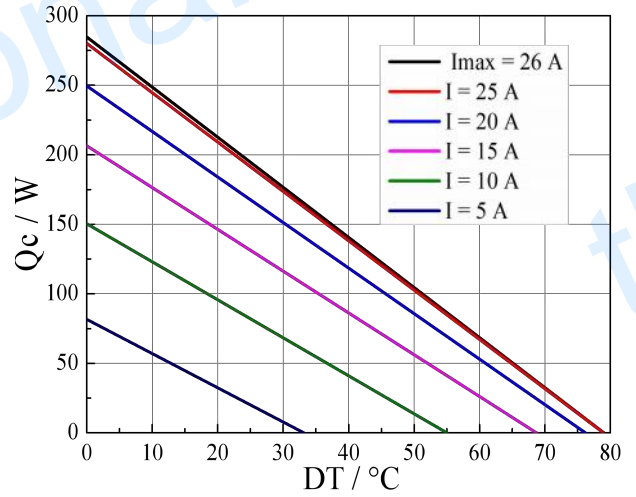

Standard Performance Graph $Q_c = f(DT)$

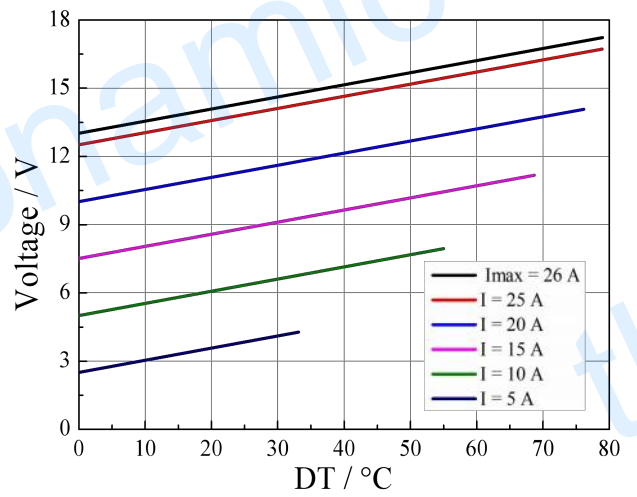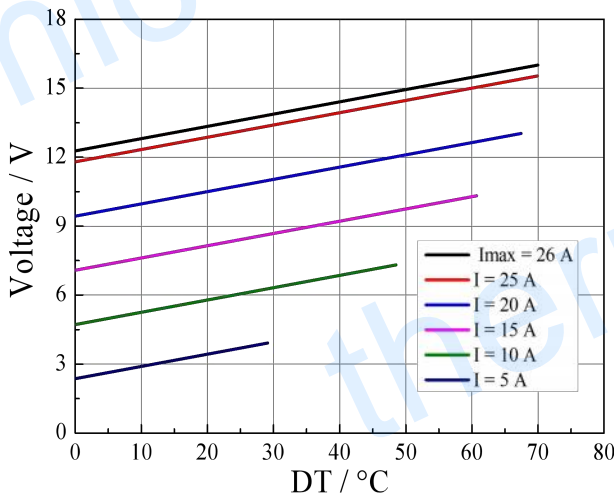

Standard Performance Graph $V = f(\Delta T)$

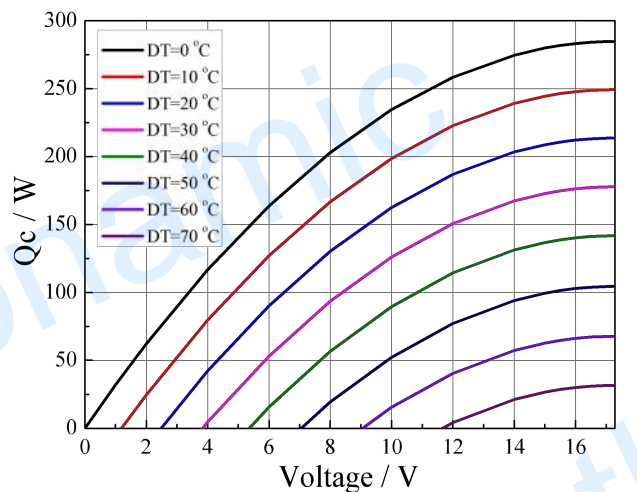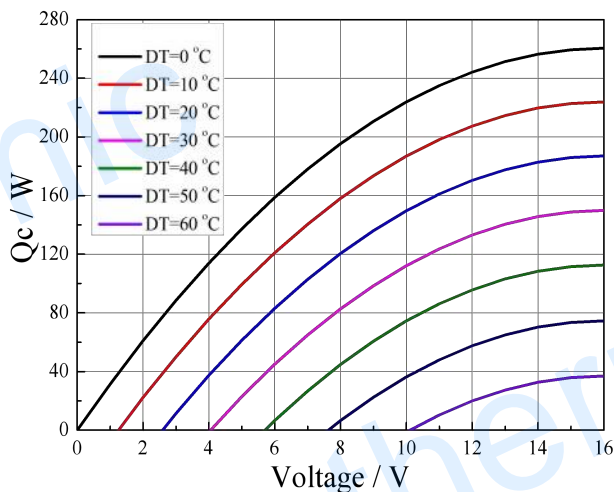

Standard Performance Graph $Q_c = f(V)$


Creative technology with fine manufacturing processes provides you the reliable and quality products

Tel: +86-791-88198288 Fax: +86-791-88198308 Email: sales@thermonamic.com.cn Web Site: www.thermonamic.com.cn


Specification of Thermoelectric Module

TEC1-12730



Performance Curves at $T_h=27\text{ }^\circ\text{C}$

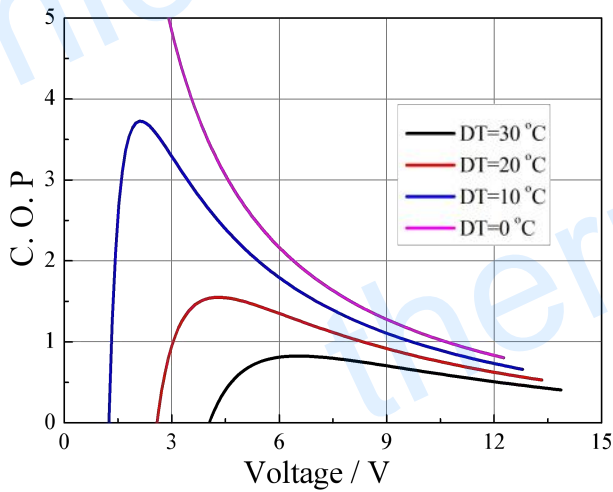

Performance Curves at $T_h=50\text{ }^\circ\text{C}$

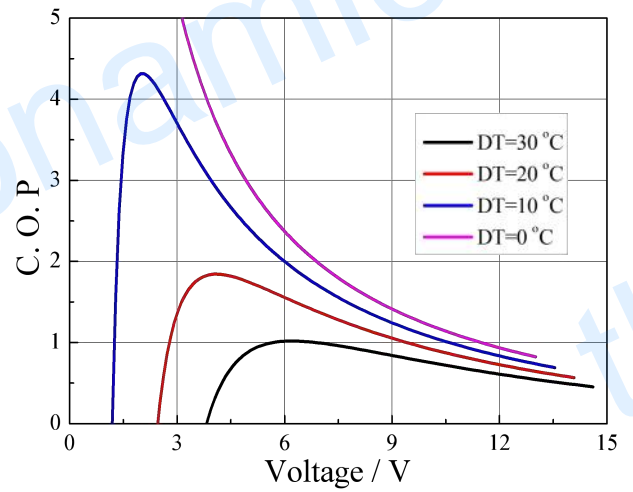

Standard Performance Graph COP = f(V) of ΔT ranged from 0 to $30\text{ }^\circ\text{C}$

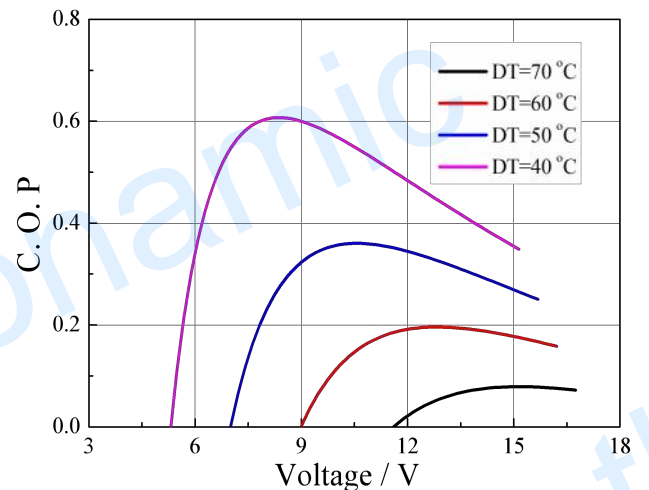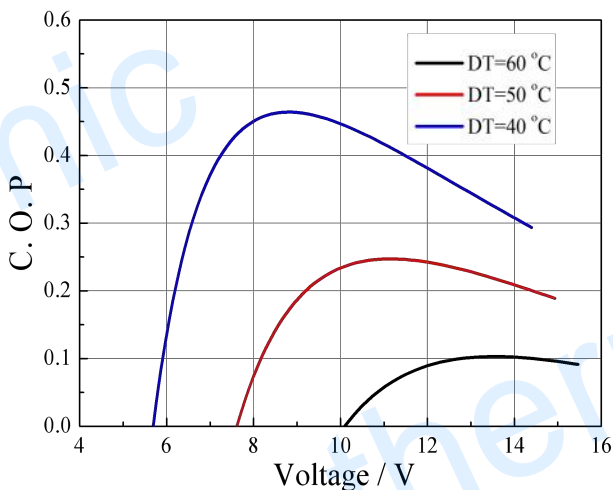

Standard Performance Graph COP = f(V) of ΔT ranged from 40 to 60/70 $^\circ\text{C}$

Remark: The coefficient of performance (COP) is the cooling power Q_c /Input power ($V \times I$).

Operation Cautions

- Attach the cold side of module to the object to be cooled
- Attach the hot side of module to a heat radiator for heat dissipating
- Operation or storage module below $100\text{ }^\circ\text{C}$
- Operation below I_{\max} or V_{\max}
- Work under DC